



MSA WPMC FORMULA SUPERCAR CLUB REGULATIONS

VERSION 1

1 JANUARY 2026

WWW.MOTORSPORT.CO.ZA



Formula **SUPERCARS**

REVIEW AND AMENDMENTS

ANY proposed / desired changes to these Championship Regulations must be submitted to the Controllers for approval. The Controllers reserve the right to introduce new Regulations and / or amend existing Regulations with the approval of Motorsport South Africa (MSA).

Amendments and updates to the rules will be recorded in the Amendment Record, detailing the updated version, date of approval of the amendment and a short summary of the amendment. The new version of the rules will be published by MSA at least seven (7) days prior to the next event being held unless a shorter notice period is approved by MSA.

AMENDMENT RECORD

<i>Modified Rule Number</i>	<i>Date Applicable</i>	<i>Date of Publication</i>	<i>Clarifications</i>

INDEX:

1. AIM OF THE CHAMPIONSHIP
2. CONTROLLERS
3. REGULATIONS
4. ELIGIBILITY
5. NUMBER OF EVENTS
6. NEW DRIVERS
7. CLASSES
8. CHAMPIONSHIP EVENTS
9. COMPETITION NUMBERS, NAMES & SPONSORS ADVERTISING AND VEHICLE PRESENTATION / STANDARDS (APPENDIX B REFERS)
10. STARTING PROCEDURE, GRID POSITIONS AND PRACTICE
11. POINT SCORING
12. DRIVER CONDUCT AND DISCIPLINE
13. ELIGIBILITY OF VEHICLES
14. TECHNICAL
15. TECHNICAL SPECIFICATIONS
16. TECHNICAL INSPECTION
17. SPARE CAR
18. MINIMUM PENALTIES FOR TECHNICAL INFRINGEMENT
19. LAP TIMERS & CAMERAS
20. WET RACING
21. ACCEPTANCE OF THE REGULATIONS
22. VOTING
23. SPARE PARTS
24. SOCIAL MEDIA
25. APPENDIX A
26. APPENDIX B
27. APPENDIX C
28. APPENDIX D

FORMULA SUPERCAR MISSION STATEMENT

TO PROMOTE EQUAL, AFFORDABLE, FUN RACING

TO ACHIEVE THIS, WE WILL:

- * Ensure equal continuity of cars-first same as last
- * Ensure that money doesn't influence results
- * Ensure that changes to specifications will only be for safety and financial control reasons
- * Ensure continuity of ideas, it may be necessary to limit the number of changes to the Committee.

All race meetings shall be held under the 2026 Motorsport South Africa (MSA) General Competition Rules (GCRs), Standing Supplementary Regulations (SSRs), these Club Regulations, the event Supplementary Regulations (SRs) issued by the promoters / organisers and any APPLICABLE Circulars of MSA.

Anything not specifically permitted is disallowed and is to be regarded as illegal. Transgressions could therefore result in exclusion from the results as provided for in the MSA 2026 GCRs regardless of whether any advantage is gained or not.

1. AIM OF THE CHAMPIONSHIP

- 1.1 This is a Club status Championship.
- 1.2 The aim of the Championship will be to declare a Western Province Motor Club (herein referred to as WPMC) Formula Supercars Overall Champion for **2026** and class Champions as applicable.
- 1.3 The Western Province Motor Club Sporting Committee, in its sole discretion, is responsible for declaring the winner of each Championship or to withhold such declaration.

2. CONTROLLERS

The Controllers of the Championship will be the Sporting Committee of the Western Province Motor Club (herein referred to as Sportcom), who have delegated the management, control and day to day running to the Formula Supercar Committee (herein referred to as FSC).

3. REGULATIONS

- 3.1 All qualifying races will be held under these rules, the General Competition Rules (GCRs) and Standing Supplementary Regulations (SSRs) of Motorsport South Africa (MSA) and all of the Standing Regulations and the Supplementary Regulations issued by the WPMC.
- 3.2 No rule is intended to exist in a vacuum; each rule should be read in the context of all rules. If there are two possible interpretations to a rule, and one interpretation conflicts with another rule, or makes another rule meaningless, that interpretation will be rejected in favour of an interpretation that is not in conflict with any other rule or makes another rule meaningless.
- 3.3 If a specific rule or latitude is not found in these regulations, whether stated it is or is not allowed, that will mean it is not allowed. The MSA GCRs or SSRs, as applicable, will then apply.
- 3.4 The Controllers reserve the right to amend these rules at their discretion. Any recommendations to amend the rules by the sub section committee will only become effective when approved by the WPMC Sportcom.
- 3.5 All and any notice or circulars in respect of this Championship will be notified to all competitors in an electronic format (email or similar). Any notice or circular will be notified no less than seven (7) days prior to any race meeting. The onus is on the Competitor to ensure that he/she has familiarized himself/herself with such a notice.

4. ELIGIBILITY

- 4.1 The Championship is open to:
 - a) Paid up members of good standing of the WPMC; and who are
 - b) **Competitors that hold the minimum of a valid MSA Club Status Circuit racing licence for cars**
~~Holders of a valid and appropriate MSA competition licence for this category;~~ and who are
 - c) Paid up members of the Formula Supercars sub-section, as applicable.

- d) Drivers may not be younger than 16 years of age unless compliant with MSA Circuit Racing SSR1 and approved by WPMC Sportcom.
- 4.2 Competitors are only eligible to score points from the time that they became members of good standing of the WPMC and the sub section.
- 4.3 Invited drivers are welcome to race and are eligible for trophies on the day but will not be eligible to score points in the Championship. ~~however they will be considered as "starters"~~
- 4.4 Vehicles competing in the Championship shall comply with these rules, the General Competition Rules (GCRs) and Standing Supplementary Regulations (SSRs) of Motorsport South Africa (MSA) and all of the Standing Regulations and the Supplementary Regulations issued by the WPMC.

5. NUMBER OF EVENTS

- 5.1 The **2026** Motorsport Calendar and Races per Category as published by the WPMC gives details of all Championship event race dates.
- 5.2 A minimum of twelve (12) races shall be run for a Champion to be declared. Should less than twelve (12) races be held, then the Championship shall be null and void.

6. NEW DRIVERS

Track day experience is advised to ensure the safety of the new entrant as well as the rest of the competitors. The FSC may require that an on-track assessment and theoretical presentation be attended prior to a first race entry being accepted.

7. CLASSES

- 7.1 The formula will be raced in three classes, GOLD, SILVER and BRONZE.
- 7.2 Class allocation will be done at the beginning of each season by the FSC. Its decision will be based on the positions obtained by each competitor driver over his/her best race results in the Previous two (2) race meetings (including qualifying).
- 7.3 The FSC may require a driver to change classes during the Championship year. Should this be necessary, its decision will be made along the same lines as above but based on the last four (4) race meetings.
- 7.4 A new driver will race in the GOLD class for a minimum of two (2) race meetings, after which the committee may decide to change his/her class for that season. The driver will however be eligible for points from his/her first race meeting onwards.
- 7.5 A competitor can only move down a class when permission is granted by the FSC.
- 7.6 For safety purposes, the FSC reserves the right to prevent a competitor from taking part in any race meeting if a lap time of 1min 35 secs cannot be posted by that competitor under normal dry conditions **at the Killarney International Raceway**.

8. CHAMPIONSHIP EVENTS

- 8.1 All qualifying races will be those set out by the FSC and/or the Controllers.
- 8.2 For **2026**, this will include all Formula Supercar races as per the WPMC calendar (to be confirmed by the means of a circular). There will be a minimum of twelve (12) races to count. A possibility of two (2) "away" races will count towards the Formula Supercar Championship.
- 8.3 To be eligible for Championship points, cars must be in possession of a valid FSC Technical Qualification Sticker.

9. COMPETITION NUMBERS, NAMES & SPONSORS ADVERTISING & VEHICLE PRESENTATION / STANDARDS (APPENDIX B REFERS)

- 9.1 Competition numbers are to be displayed on right and left side door area and left front top corner of the windscreen. Competition numbers will be size and script as decided on by the FSC.
- 9.2 The driver's name will appear on both left and right-side windows.
- 9.3 The driver's name and car number will be shown on the rear bulkhead.
- 9.4 All vehicles are required to carry the Formula Supercar series sponsor or sponsors' decals (as supplied) on the top portion of the front windscreen and back window, both front fenders, bumpers and / or as otherwise required by the sponsor and the Controllers. No other signage or decals may be carried on these areas. Permission may be granted by the FSC to carry signage on these areas if not taken up by a series sponsor. Contingency and day/minor sponsors' decals will be placed on the bottom sills between the jacking points on each side of the car or otherwise stated by the FSC. If there is conflicting advertising, permission not to display such decals must be sought from the Supercar Committee. The granting of such permission may result in the competitor forfeiting such sponsors' monies payable on race day or away races. The Controllers will have the right to require a competitor to bring his/her vehicle into compliance with the approved visual standards (to be defined by means of a circular). Competitors not complying with these requirements will be precluded from participating in any further events until the vehicle complies as per Appendix B.

10. STARTING PROCEDURE, GRID POSITIONS AND PRACTICE

- 10.1 All drivers and their cars must be in the allotted Supercar pit area thirty (30) minutes before the start of Qualifying, Race 1 and Race 2 & may not be removed from the Supercar pit area for the duration of the race meeting without permission from the Formula Supercar Specialized Scrutineer or a Formula Supercar committee member. Where qualifying and the races are run on different days, the vehicles may be removed for overnight "storage".
- 10.2 Number of starters: In order for the event to qualify for Championship status, a minimum of six (6) vehicles must take to the track for either qualifying or be on the grid for the start of the race.
- 10.3 Classes will qualify regardless of the number of starters in the class, provided that the qualifying session or race qualify in terms of the Championship status in point 10.2 above.
- 10.4 All vehicles leaving the track after the start of qualifying or any race MUST enter the pit area via the Weighbridge for technical Weight check as per point 15.1 a below. Should this not be possible, the driver must request the assistance of an official to accompany him/her with their race vehicle to the weighbridge area, before proceeding back to the official Supercar pit area.
- 10.5 The race start will be a rolling start. With the approval of the Clerk of Course a standing start can be substituted for the rolling start, should this be deemed necessary due to circumstances prevailing on any race day.
- 10.6 The starting positions for the first (1st) race on any race day will be the result of qualifying with the driver posting the fastest time being placed in pole position and the rest of the field lining up behind him/her, from the second fastest time to the slowest. In the case of qualifying being cancelled or not taking place for any reason, the grid positions for the first (1st) race of that day will be according to the latest Formula Supercars Club Championship points standings (Regardless of the class of the competitor). If cancellation takes place prior to the first (1st) race of the year, the starting grid for race 1 will be as per the previous year's final overall results, with class Champion starting on pole and so on.
- 10.7 The second (2nd) race starting positions will be according to a partial reverse grid procedure. The first six (6) drivers in race 1 whose fastest lap time falls within 102% or less of the fastest lap time set in heat 1 will become part of the reverse grid. The order of the reversed grid will be determined as follows: The driver with the slowest lap time in the 102% category starts first (1st) on the grid, the second (2nd) slowest lap time in second (2nd) position and so on back until the last person in the 102% category.

The winner of race 1 must start at the back of the 102% category. The remaining drivers take their grid positions behind the 102% category in the finishing order of race 1.

The Controllers, in the interest of safety and competitive racing, may request changes to the grid order and spacing.

Should changes to the grid become necessary, these will be made in conjunction with the Clerk of the Course.

10.8 Drivers will not be allowed to work on their cars on/or next to the track during Qualifying or either of the races.

11. **POINT SCORING**

11.1 Points will be scored for qualifying and for the races. **If there are more than two (2) races held on a day, only the first two (2) races will count towards Championship.**

~~11.2 The maximum number of points scored for any one timed trial or race will be equal to the number of starters for the particular day.~~

11.2 To be classified as a starter a competitor must cross the start line and activate the timing system in, qualifying or any of the races on the day.

~~11.4 The winner of qualifying (fastest timed lap) or race (first across the finishing line after completing the required number of laps) will receive the maximum number of points (equal to the number of starters).~~

~~11.5 Each successive placing will receive one point less than the placing ahead.~~

11.3 A bonus point will be awarded to:

a) ~~The driver whom qualifies on pole.~~

b) ~~The driver whom wins a (race) heat.~~

a) The driver that posts the fastest lap per race.

11.4 **Drivers missing more than two (2) consecutive post race meetings will be penalized one (1) point in Championship standings. Every consecutive meeting missed there-after will result in a one (1) point deduction for each meeting missed. Drivers will be given the opportunity to attend post-race meetings in person or virtually. Both will count towards attendance.**

EXAMPLE:

~~There are 15 starters.~~ The winner receives fifteen (15) points ~~plus 1 bonus point~~, 2nd- thirteen (13) points, 3rd- twelve (12) points, 4th-eleven (11) point, etc. All starters will receive at least one point, provided paragraph 11.3 above has been complied with the driver who posted the fastest time in the race (excluding qualifying) gains a bonus point.

- The competitor with the greatest number of points on the day will be declared the winner of the day. In the event of someone being excluded all the Competitors behind him/her will receive one (1) point more. Any non-finishers will still get one (1) point, provided that they cross the start line and activate the timing system.
- The Formula Supercar Club Champion of the season, in each class, will be the competitor with the greatest number of points scored for the season.
- If there is a tie, then this will be resolved by the competitor with the highest number of placing points. E.g. Competitors with the most firsts, if this does not resolve the tie, then the highest number of fastest laps (excluding qualifying), then the highest number of seconds and so on. In the event that the above does not resolve a tie, the shortest combined race-time for race 1 and 2 wins.

- The three (3) lowest scored races, (any combination of races and this can include qualifying and ~~DNS~~ **DNR**) will be dropped when the full season has been raced, excepting if a competitor was excluded. This will include any bonus points that make the total for the heat. Excluded results may **NOT** be dropped (GCR 234i refers.) Should a qualifying session or race be cancelled, it will **NOT** count as a result which may be dropped.
- In order to be classified as a finisher, a car must complete no less than 66.6% of the race distance under its own power.
- The official scored results of every race meeting will be notified in an electronic format, one (1) week after the race meeting, and will become final fourteen (14) days, thereafter GCR 279 refers.

12. DRIVER CONDUCT AND DISCIPLINE

- 12.1 Driver conduct will be as per **MSA 2026 GCRs**.
- 12.2 Drivers will be informed at the drivers' briefing whether or not a "white line rule", (as per SSR 50 i): i)), is in effect for that day's race meeting. If so, it will not apply to the first and the last lap of any race and will only apply to two (2) corners (turn one and turn five) The leading car in any group entering a controlled white line corner must remain on the outside of the line.
- 12.3 Attendance at drivers briefing is compulsory for all drivers. Drivers roll-call and briefing will be held in the Formula Supercar pit area thirty (30) minutes before qualifying and Race 1 – A driver may nominate a representative to attend the drivers briefing on his behalf. Drivers not attending or failing to nominate a representative will be fined R500-00 (five hundred rand) and will start race 1 at the back of the Supercar grid.
- 12.4 A driver making contact with another vehicle behind the B pillar, will be responsible for any incident thus arising. This incident should not be made a racing incident.
- 12.5 If a driver is involved in an incident which is not deemed by the Clerk of the Course (or the Stewards in the case of a protest) to be a racing incident, that driver shall be issued with a yellow card that will be enforced for the next two (2) race meetings.
- 12.6 The yellow card will be represented by a yellow decal placed on the car's rear window.
- 12.7 If the driver is again involved in an incident where he/she is deemed to be the guilty party he/she will be issued a red card, and he/she will forfeit five (5) points for that race meeting.
- 12.8 Drivers are to note that a maximum speed limit of 40 km/h is allowed in the pit area/s.

13. ELIGIBILITY OF VEHICLES

- 13.1 Only vehicles built or repaired, solely from the components specified and authorized by FSC, will be eligible. The Controllers reserve the right to notify the use of an alternative part or component.
- 13.2 No modification or alteration to, or removal of any component in any part or whole is allowed, from the vehicle supplied unless permitted elsewhere in these regulations.
- 13.3 All vehicles will be subject to maximum power, maximum torque and minimum weight restrictions, as prescribed and monitored by the FSC
- 13.4 For any performance changes required, there will have to be a 75% in favour vote by Formula Supercar drivers that have participated in the last three (3) events. (Safety items will be with immediate effect and where possible seven (7) days' notice will be given).

14. TECHNICAL

- 14.1 Technical rulings are final. Should any changes to technical specifications become necessary, these will be by an official Formula Supercars notification and be signed off by the Controllers.

14.2 The Controllers will conduct random checks to ensure that cars comply with the technical specifications as set out in these rules. The Controllers have the discretion to co-opt any suitably qualified person or persons to assist in these random checks.

15. TECHNICAL SPECIFICATIONS

N.B. Any transgressions in respect of these technical specifications will result in exclusion or a monetary fine. GCR 176 will be applied.

15.1 WEIGHT

- a) Will be not less than 895 kilograms, including the driver in race apparel, as weighed in the Parc Fermé area (on the scale of the day) after completion of qualifying and all the races. Failure to weigh will attract the same penalty as underweight.
- b) No eating or drinking is allowed until weighing has been completed.
- c) If ballast is required, it must be bolted to the chassis in front of the driver's seat in the bolting position provided.
- d) The penalty for underweight is exclusion. If a piece of the car or body has been lost during the race or qualifying, the part may be recovered and included in the weight. (This will be decided by the Supercar Specialized Scrutineer).
- e) A vehicle that breaks down must enter the pits via the weighbridge and comply with the weight requirements.
- f) A vehicle that has been damaged as a result of an accident and is not mobile, because of the accident, as verified by the Specialized Scrutineer will not be required to pass via the weight bridge.

15.2 TYRES

- a) The only tyres allowed are the ones approved by the FSC in writing. A maximum of one (1) new tyre may be used every race meeting except for the first (1st) Formula Supercar event of the year, when four (4) new tyres are permitted.
- b) Three (3) used tyres MUST be used by the competitor for the next race meeting. Tyres may not be changed during the course of a race meeting, i.e. the four (4) tyres on the car at the start of the race meeting will be used for the whole day's racing. Controls in this regard will be carried out on race day.
- c) Should a tyre or tyres be damaged or otherwise become unsafe or unfit for use during the course of a race meeting, the Specialized Scrutineer must be informed, and he/she alone will decide whether or not a tyre or tyres may be changed.
- d) **PENALTY FOR NOT USING THE 3 (THREE) USED TYRES FROM A PREVIOUS RACE MEETING:**
Notwithstanding the provision of 13(b) of these regulations will require completing a minimum of six (6) laps during the qualifying session for that day and will start at the back of the grid for the first (1st) race of that day. - Starting at the back of the grid shall not imply an exclusion - the Competitor or effected party will not be able to score more than one (1) point for qualifying.
- e) Should a driver be starting his/her first race during the season (i.e. not on the first race meeting), the driver may start with four (4) new tyres.

15.3 FUEL

- a) Fuel type and octane level is open, provided the resulting octane level does not exceed 102.6 octane.
- b) The use of oxygenates is prohibited.

- c) Should standard unleaded 95 octane pump fuel be used, it must be in conjunction with an octane booster (only as stipulated and supplied by the Supercar Committee). For the **2026** season, the approved octane booster is NF 6 RON.
- d) The Controllers' reserve the right to introduce controlled fuel and to take whatever steps may become necessary from time to time.
- e) In a further effort to curtail possible infringements, the Controllers may give permission to carry out fuel testing and analysis. All procedures will be carried out in terms of GCR240. A minimum of five (5) litres of fuel must remain in the vehicle tank at the end of any qualifying or any race.

15.4 POWER

- a) The maximum power output will be 135 kW and 222NM to be measure at the flywheel and which ~~roughly~~ equates to 110kW and 185NM at the wheels. This will be officially measured on a dyno specified by the Supercar Committee.
The official designated dyno for the season will be 1st Performance in Killarney Gardens and will be measure at the wheels at 110KW and 185NM max ruling.
- b) Ignition timing position is free.
- c) There will be no comeback against the dyno operators/owners or the controllers in the event of damage while a vehicle is being run on the dyno.
- d) Dyno runs will be conducted according to the following procedure:
The dyno is to be operated by an independent operator as far as possible, but in any case, the operator is to be approved by the controllers. All runs will be conducted in 4th gear 1 to 1 ratio.
 - i) Approved race tyre for the season to be fitted.
 - ii) The tyre pressure is to be checked and set to two (2) bars on the rear wheels.
 - iii) ~~The warm-up session before any power runs will be 2 minutes, timed by the Supercar TC with a stopwatch. The warm-up session before any power runs will be up till the point the water temperature has reached 80 degrees Celsius. This is to be measured on the water channel that forms part of the front engine mounting plate.~~
The warm-up session before any power runs will be up till the point the water temperature has reached 80 degrees Celsius. This is to be measured on the water channel that forms part of the front engine mounting plate.
 - iv) Set dyno to inertia reading, run up to 6,500 RPM, do not record but make sure readings are working on dyno (are constant readings).
 - v) All power runs will be recorded up to a maximum of 7,150 RPM and not faster than 195 km/h.
 - vi) 1st Power reading completed, stop engine, record both kW and torque readings. All power runs readings will be taken from above 5000 RPM to 7150 RPM.
 - vii) 2nd Power reading as above but must be completed within five (5) minutes of 1st run.
 - viii) 3rd Power reading as above but must be completed within five (5) minutes of 2nd run.
 - ix) Add up all three (3) kW readings and divide by three (3).
 - x) Add up all three (3) torque readings and divide by three (3),
- e) Cars Identified for a dyno run during or after a race meeting will be run on the dyno immediately following the race meeting and/or must be run within four (4) days of the meeting at which it was identified. Cars will be run from cold in the manner described in above dyno procedure. **Cars will be kept in parc ferme conditions until such point as the post dyno runs have been completed. Cars designated for “post-race” dyno runs will be stored until such point in an area identified and designated by the FSC Committee.**
- f) Ignition timing and cam timing may be checked after timed trials and recorded. If it becomes necessary to check settings, the Specialized Scrutineer, must be notified so that it can be rechecked and noted. Cars will be run from cold in the manner described in above dyno procedure.

- g) Ignition timing of the ECU and cam timing may be checked after qualifying and recorded. If it becomes necessary to check settings, the Specialized Scrutineer, must be notified so that it can be rechecked and noted.
- h) Cars are to be marked (via FSC dyno sticker) once dyno is complete and power is within the rule limits. Cars not receiving the appropriate sticker will not be able to score for the races until such point they are deemed legal and marked. **Stickers are to be placed on frame, below the fire extinguisher, facing the driver.**
- i) **All cars to be dyno 'ed are to be in race spec. Thus, the body panels and wings to be fitted.**

15.5 ENGINES

- a) Only 2 litre Opel 8 valve engines, with 2.0E round port cylinder heads are permitted. The 1800 Opel block may be used and bored out to accommodate two (2) litre pistons. Blocks may be sleeved.
- b) It is acknowledged that the below specifications may produce an output greater than that permitted in 15.4 a). Should this occur, the engine MUST be detuned to the required power limits as set out in 15.4 a)
- c) N.B. Modifications other than those listed herein are not permitted.

15.6 BORE AND PISTONS

- a) Piston makes and manufacturer is open.
- b) Bore size - Standard 86.0mm
- c) First oversize - Oversize pistons to 86.5mm
- d) Second oversize - Oversize pistons to 87.0mm

15.7 HEAD GASKET

- a) Free

15.8 CYLINDER HEAD

- a) Machining may only be done by Mike Rabeling Engineering and controlled by the Supercar Specialized Scrutineer.
- b) The job number will be stamped on the cylinder head by Mike Rabeling Engineering.
- c) For record and control purposes the specifications must be recorded by Mike Rabeling Engineering for every cylinder head.
- d) The cylinder head currently in use by the competitor must be recorded in the competitors scrutineering log book

For control purposes, the following must be recorded:

- a) Inlet manifolds as specified by the Supercar committee and matched 10mm deep on inlet manifold side and 25mm deep on head side.
- b) No machining is permitted in the combustion chambers other than that of the valve seats.
- c) The maximum diameter of the intake port permitted is 36,5mm.
- d) Valve Seats: New Valve Seats may be fitted to prolong the lifespan of the cylinder head.
- e) ~~Valves: Valve manufacturer type is open, but the overall length and diameter of valve must conform to either of the below dimensions:~~

Valves: The only valves per permitted are as listed below. The dimensions must remain standard as supplied with exception of vale lengths that may be shortened as required when cutting of the valve seats is required.

Standard Opel Valves

Part numbers:

Inlet GMT T29106 Exhaust T T291162

OR

Vera replacement valves

Part number:

Inlet 79259 Exhaust 79258

OR

Osvat valves

Part Number:

Inlet 1393 Exhaust 1396

15.9 PISTON RINGS

Any make or type may be used

15.10 CRANKSHAFT

- a) The only permitted crankshafts will be the Opel 2 litre 8 valve or 16 valve crankshafts.
- b) Balancing is allowed only to achieve balance, and not to lighten.

15.11 CONRODS

- a) Make and type are free.
- b) Conrod length must conform to standard length of the Opel 2 litre 8 valve conrods.
- c) Balancing is allowed only to achieve balance and not to lighten.
- d) ARP big end conrod bolts are allowed.

15.12 PISTONS

Pistons may be balanced.

15.13 FLYWHEEL AND CLUTCH ASSEMBLY

- a) The Clutch assembly is free of restriction
- b) Flywheel weight to be a minimum of 4.0 kg after any machining or balancing has been done.

15.14 GEARBOX

- a) Standard Getrag 240, 5 speed gearboxes, with external gearshift. Gear ratios: 1st: 3.717, 2nd: 2.019, 3rd: 1.316, 4th: 1.000, 5th: 0.804, or Standard Toyota 21R 5 speed gearbox.
- b) The use of a BMW E series shifter mechanism is permitted. Only the adapter housing for this shifter mechanism as supplied by the FSC may be used.

15.15 DIFFERENTIAL

- a) Gearmax 4.11 ratio with limited slip as per Gearmax specifications.
- b) The maximum pre-load/slippage (hot) of 100Nm is allowed.

15.16 CAMSHAFT

- a) Only the Supercar AST31 Kent Grind camshaft is allowed.
- b) Only Vernier cam pulleys specified by the Supercar committee may be used

15.17 VALVE SPRINGS

- a) Free

15.18 CARBURETTORS

- a) No machining or modification is allowed.
- b) Air filter foams as supplied, with no thinning out or cutting are allowed. Air filter material and bridge is allowed as supplied by the manufacturer.
- c) Carburettor jetting cover butterfly nuts are to be drilled through two (2) places and sealed by the appointed Specialized Scrutineer.
- d) Specifications:
 - Weber : 45mm D.C.O.E.
 - Main jets : Jet Size is free
 - Air jets : Jet size is free
 - Emulsion : F16
 - Choke sizes : 36

15.19 SPARK PLUGS

Any make and type of Spark Plugs may be used

15.20 OIL & FUEL FILTERS

Any make and type of oil and fuel filters may be used.

15.21 INLET MANIFOLD

Only originally fitted inlet manifolds supplied by OAD & specified by the Controllers may be used.

15.22 WINDSCREEN

- a) Front: Only standard glass or minimum of 5mm clear polycarbonate is permitted.
- b) Others: All other windows must be of 2mm clear polycarbonate.
 - A Driver side window is permitted, provided it does not cover more than one third (1/3) of the opening length-ways across the bottom sill.

15.23 INSTRUMENTATION DASHBOARD, REV. COUNTER

- a) Dashboard layout is open and any type of gauges, lap timers and digital displays maybe be used, as long as all the equipment mounted on the dashboard provided that it does not protrude over the edges of the dashboard plate and fits underneath the dashboard cover.
- b) Switches and brake bias may be extended to suit the driver but not relocated. The make of gauges and switches is free. The dashboard panel must remain in its original location (as manufactured) and may be moved towards the drivers by no more than 50mm.
- c) The Dashboard Cover as supplied by the FSC must be fitted. The original dashboard must be used, and replacements will be supplied by the Formula Supercar Committee. The original Owen Ashley plaque must be kept and be visible.

15.24 BODYWORK

- a) Only the fiberglass body shell as supplied by the committee's approved supplier, and specified in Appendix B may be used.
- b) Extra aluminium finishing off strips and rubber seals are permitted, provided that the controllers are satisfied that there is no advantage gained in performance. Crash damage may be repaired, but exterior dimensions, shapes and profiles must remain unaltered. Temporary repairs affected at the track on race day that do not conform to the aforesaid will be allowed, but for that one race meeting only.
- c) The rear window stiffener-brace as specified by the Supercar committee must be used.

- d) The gaps between the body-shell & the front firewall as well as the gap between the body-shell & the rear firewall must be closed with fire-retardant sponge.
- e) Only the bottom four (4) bolts and the rear top two (2) bolts have to be used to secure the body to the chassis.
- f) The rear of the body shell may be mounted to chassis.

15.25 SAFETY NET

The fitting of the safety net is compulsory on the inside of the roof and the driver's side and must comply with Formula Supercars specifications. Drop-down or lift-up type will be allowed.

15.26 REAR TOW HOOK

Only the bolt-on canvas type rear tow hook as supplied by Formula Supercars is allowed, no metal rear tow hooks may be used.

15.27 PROPSHAFT

Only a one (1) piece tube measuring between 75mm to 87mm steel or stainless steel may be used

15.28 SPOILER

The Spoiler must be Fiberglass only as supplied by the FSC may be used.

15.29 ALL SUSPENSION ARMS

- a) 21 OD schedule 80 +/- 0,5mm
OR
- b) 26,6 OD 3mm wall thickness +/- 0,5mm

15.30 ONE WAY VALVE IN VACUUM LINE BOOSTER

This is optional

15.31 VERTICAL CHASSIS, FRONT WISHBONE SUPPORT MUST BE

48mm OD x 3mm wall thickness	plus/minus 0,5mm
48mm OD x 2mm wall thickness	plus/minus 0,5mm

15.32 FRONT ANTI-ROLL BAR

The Connector must be Aluminium with thicker suspension arm 26.6mm OD steel with thinner suspension arm.

15.33 THE VERTICAL TOP FRONT CHASSIS TO TOP SUPPORT ARM

This must be 50 x 25 x 3mm or 50 x 25 x 2mm

15.34 TRAMP ROD TO CHASSIS CONNECTORS

Chassis #1-7	50 x 25 x 2 with 3mm gusset
After that	50 x 25 x 2 rectangular

15.35 SUSPENSION SETTINGS

On car, where adjustable are free within specifications - see Appendix A.

15.36 DIFFERENTIAL SETTINGS

0° Straight-ahead or toe-out.

CAMBER +/- 1/4°

15.37 REAR TRAMP ROD LENGTH

910mm +/-5mm

15.38 COIL SPRINGS

Front 8" x 650 lbs coil wire +/- 13,2mm

Rear 8" x 350 lbs coil wire +/- 11mm

15.39 REARVIEW MIRRORS

Interior: Mirrors are free.

Exterior: Mirrors for the driver's side and passenger side must be from the BMW E36 M3 type or Opel Mirror.

15.40 BRAKES

- a) Optional: 100mm diameter front brake air ducting may be used.
- b) Only the new type of rear brake (disk) system is permitted.
- c) The old 23/19 master cylinder / booster combination or the new 23/23 combination or the new 23/19 combination system is permitted.
- d) Braided brake hoses are permitted.
- e) Type and make of Brake Pads are Free

15.41 EXHAUST

The only exhaust permitted to be used is as supplied by the Supercar committee via Powerflow in Salt River. The exhaust may be wrapped with Heat Wrap.

15.42 BONNET MOUNTINGS

The rear bonnet mounting posts welded to the chassis may be replaced by threaded posts extending through the upper chassis tube.

15.43 REAR WING

- a) The only rear wing permitted to be used is as supplied by Formula Supercars and is to be bolted to the mounting plates provided on the chassis. The rear bolts may be replaced by 8mm steel pins drilled to accept quick release clips.
- b) No alteration to the size or position of the holes in the chassis mounting plates is permitted.
- c) The height of the rear wing may not be changed from the original design specification. The height when measured from the top of the upper rear chassis member to centre of the leading edge of the rear wing must be 320mm with an allowed tolerance of 15mm up or down.
- d) The screws used to secure the rear wing to the two vertical aluminium uprights may be replaced with bolts & nuts.
- e) A single hole in the body must be cut to allow measuring of the rear wing height.

15.44 CHASSIS

- a) Only the original Supercar chassis design may be used.
- b) Major chassis repairs – These must be carried out by a Supercar committee approved technician.
- c) Structural repairs to the chassis, frame or roll-cage must be inspected and approved by the Supercar Specialized Scrutineer before being allowed to compete in the Supercar Championship.

- d) Any newly built Supercar chassis must be inspected for structural integrity and dimensions, and approved by the Supercar Specialized Scrutineer before being allowed to compete in the Supercar Championship.
- d) Parts of the chassis may be reinforced for safety purposes and approved by the Supercar Specialized Scrutineer.

15.45 SHOCK ABSORBERS

The only shock absorbers that are permitted are those that were supplied according to specifications from GT Shocks CC and fitted by Owen Ashley Auto Developments at the time that the original Supercar was built; or

any other shock absorber as approved and supplied by the Supercar Committee. Replacement shock absorbers must be purchased from GT Shocks CC- (Part Number for front and rear is GTS 007-SC) - Each batch of shock absorbers produced by GT Shocks CC has a unique number and can be traced back on the GT Shocks CC database

Basic dimensions of the shock absorber in mm (without top mounting) are as follows:

a)	Body length	193 mm (measure from top of body to centre of bottom mounting)
b)	Extended length	298.5 mm – excluding thread on rod
c)	Collapsed length	202.0 mm – excluding thread on rod
d)	Top end (rod)	M10 x 14mm long
e)	Bottom end	Diameter of 16mm x30mm

15.46 RADIATORS

The only radiators that are permitted are the standard radiators as supplied at inception by OAD, or type as approved and supplied by the Formula Supercars committee as laid out below:

- a) Radiator Goldwagen Code A1242 Rad A17B1 VW Caddy Radiator
- b) Expansion Bottle Goldwagen Code A3445 Goeie Hoop Onderdele Code WB. VW 103006 Water Bottle Golf
- c) Cap Goldwagen Code A039 Goeie Hoop Onderdele Code VW103451 Cap Expansion Tank.

15.47 FUEL PUMPS

The only fuel pump permitted to be used is the Facet Fuel Pump 40242 as supplied by Formula Supercar Committee or Goeie Hoop Onderdele, Code PP.FED.FP40242 Universal 12V Fuel Pump

15.48 ALTERNATORS

Alternators with the mounting brackets as supplied by Formula Supercar Committee must be installed when the ECU is replaced from the optic pickup eye type to the new official Supercar ECU.

15.49 SAFETY BELTS AND SEATS

- a) A minimum of a 4-point approved safety harness of the quick release type.
- b) Safety Harnesses / Belts are to comply with GCR 239 D.

15.50 RUBBER HOSES

Rubber hoses e.g. Radiator hoses, breather pipes, etc may be replaced with adequate silicone type hoses.

15:51 BRAKE LIGHTS

A working brake light needs to be fitted to the rear of the car and clearly visible. Activation of light via Brake sensor on brake pedal. Brake lights may be deactivated at the discretion of the Specialized Scrutineer for the race event.

16. TECHNICAL INSPECTION

- 16.1 Formula Supercars may be checked at any time during an event, for legality by the appointed Technical Committee members or the official MSA Scrutineer/s. Internal checks will be subject to GCR 254. If a car is required to be stripped, the driver must provide a mechanic to do the necessary tasks as directed, or else a mechanic will be appointed on his/her behalf by the FSC. The mechanic will be paid by the competing driver.
- 16.2 Through a random selection process, a minimum of three (3) cars may be checked for technical compliance after each race/heat, including qualifying.

17. SPARE CAR

No spare car is allowed. Drivers are only permitted to compete in the car that he/she qualified in for that race meeting.

18. MINIMUM PENALTIES FOR TECHNICAL INFRINGEMENT:

Unless otherwise stated herein, any transgressions in respect of these technical specifications will result in exclusion or a monetary fine. GCR 176 will be applied.

- 18.1 First penalty - exclusion from that day's race meeting only.
- 18.2 Second penalty - penalized to the full extent of the MSA handbook including GCR 176.

19. LAP TIMERS & CAMERAS

- 19.1 The specified lap timer to be used is the Alfano. Models: Fun & Fun V2, or any other lap timer that is approved in writing by the FSC.
- 19.2 Any telemetry and logging devices approved in writing by the committee may be used.
- 19.3 Onboard camera(s) are allowed.

20. WET RACING

- 20.1 When required, A WET Race will be declared by the Controllers.
- 20.2 ~~Supercars are not suitable for wet weather racing.~~ The FSC may negotiate a change of program with the officials of the day, **should it appear that the weather conditions may clear during the day of any said event.** **later.**
- 20.3 A rain light as supplied by the Supercar Committee is compulsory for wet weather racing. These are to be fitted to the rear of the body and to be switched ON to the flashing mode during a WET qualifying session and / or race. Failure to fit the light or for it not being switched on will result in the driver being black flagged, not being able to start the race or being excluded from the results for that session or race.
- 20.4 Demisting of the windscreen is only permitted via flexible ducting or pipes through the driver's side window opening or quarter window. No additional holes may be made in the left, front, rear windows or bodywork for the purposes of routing demisting pipes.

21. ACCEPTANCE OF THE REGULATIONS

Each driver will sign a document confirming receipt and acceptance of these rules and regulations before competing in any Formula Supercar race, Championship or Series.

22. VOTING

Should a vote by members be required, only one (1) vote per car will be allowed.

23. SPARE PARTS

In the event that a member has been found to purchase any items from this list from an alternate supplier, the sanction imposed shall be determined by the Supercar Committee, and their decision shall be final.

The following spare parts may only be purchased from the Supercar Club:

Front Bumper	Octane Booster
Tramp Rods	Panhard Rods
Wishbone – Left and Right	Castor Rods
Front and Rear Light Decals	Windscreen Decal
Door Panel Stickers	Front Bumper Support Ply Boards
Air Filters	Rear Brake Disks
Cam Shafts	Ignition ECU
Dashboard Covers	Dashboard Plate

Aluminium Adapter Plates and Eye plates can be purchased directly from Vulcan Steel – part numbers listed under Woodwork Specialists


THIS LIST MAY BE AMENDED BY THE SUPERCAR COMMITTEE AT ANY TIME AND WILL BE COMMUNICATED TO MEMBERS

24. SOCIAL MEDIA

Social media, including, but not restricted to, Facebook, Instagram, Twitter, WhatsApp etc. is a powerful and wide-reaching medium for the expression of views and opinions, and the sharing of photographs and video. As such, competitors should be aware that their conduct on social media regarding the Formula Supercar Championship, WPMC, its drivers and sponsors should reflect the impact social media has. If a competitor is considered to have brought the Championship and/or WPMC into disrepute in the opinion of the Championship Controllers, they may be subject to a penalty or disqualification from the Championship. Additionally, competitors are reminded that the Motorsport SA monitor social media and any remarks that are deemed to bring the sport into disrepute can lead to penalties. For clarity, it is accepted that crashes are an inevitable feature of motor-racing and the posting on social media of imagery containing a crash does not bring motorsport into disrepute, but competitors are reminded that careless associated comments may do.

25. APPENDIX A


Appendix A

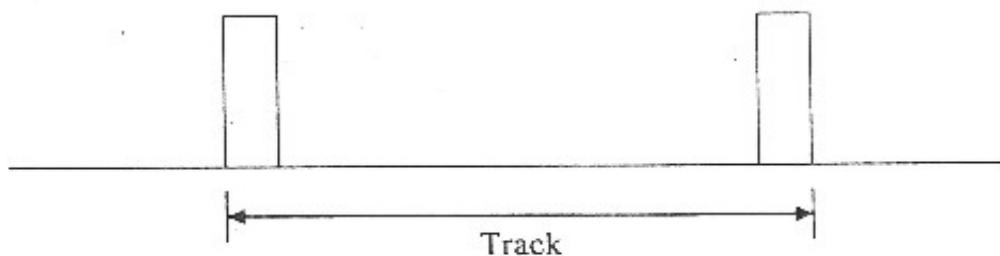

Front track: 1715 ± 25 mm.

Rear track: 1750 ± 15 mm


Tracks are to be measured at ground level at the widest point of rim/tyre with 90° square.

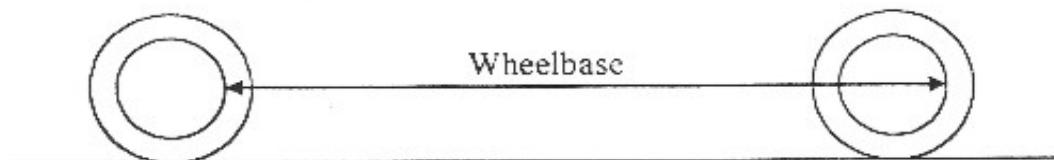

Wheelbase: Maximum: 2530 mm

Minimum: 2510 mm

To measure wheelbase, face steering wheels straight ahead. Measure from front of front rim to front of rear rim on both sides of car. Add the two measurements and divide by two.

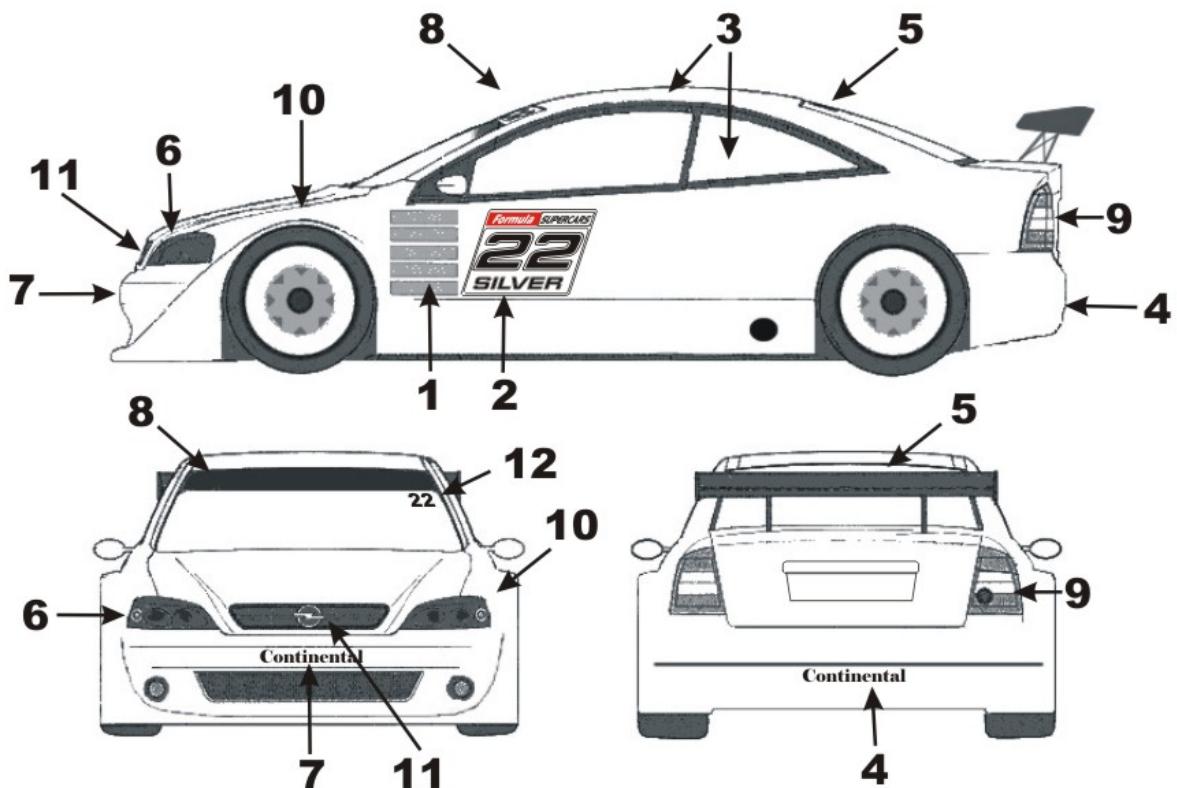**1. Support Sponsors Decals:**

Location: Forward portion of door panel – both sides

Dimensions: as supplied by FSC only

2. Formula Supercar Logo & Car Number

Location: Centre forward portion of door panel – both sides

Dimensions & Font: as supplied by FSC only

3. Drivers Name:

Driver Name and the national flag(s) of their country of origin. Blood Type may be indicated.

Location: as pictured

Dimensions: (White 100mm high letters, Arial Black font)

4. Rear Bumper Sponsors decal – Tyre Brand in use

Location: centre of rear bumper

Dimensions: as supplied by FSC only

5. Rear window top band – Sponsors decal:

Location: Top portion of rear windscreen

Dimensions: as supplied by FSC only

6. Front headlights

Location: Front headlight areas on bodyshell (left & right)

Dimensions: as supplied by FSC only

7. Front Sponsors decal – Tyre Brand in use

Location: centre of front bumper

Dimensions: as supplied by FSC only

8. Front Windscreen top band – Sponsors decal: Kaltron

Location: Top portion of front windscreen, full width

Dimensions: as supplied by FSC only

9. Rear taillights

Location: Rear tail light moldings on bodyshell (left & right)

Dimensions: as supplied by FSC only

10. Front fenders – reserved for series sponsors

Location: left & right fender area above wheel arch.

Dimensions: as supplied by FSC only

11. Front grille & badge

Location: Front grille molded area in bodyshell

Dimensions: as supplied by FSC only

12. Car Number on Windscreen

Location: Upper left corner of front windscreen (passenger side) incorporated into the Front Windscreen top band – Sponsors decal.


Dimensions & Font: As supplied by FSC

27. APPENDIX C

Getrag 240 (5-speed) for Opel

Gear ratios

First	3.717 : 1
Second	2.019 : 1
Third	1.316 : 1
Fourth	1.000 : 1
Fifth	0.804 : 1
Reverse	3.445 : 1

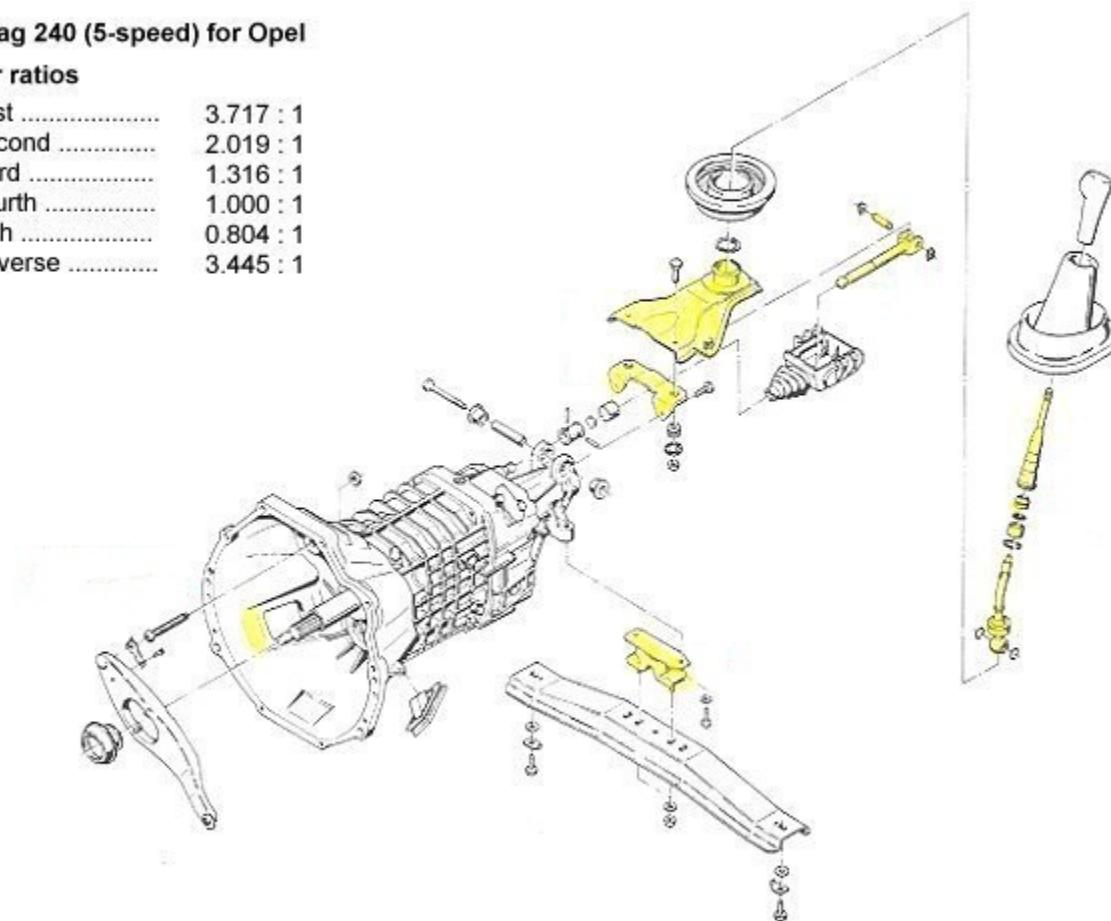

28. APPENDIX**D**

Formula Supercars South Africa
 Killarney International Raceway, Potsdam Road, Cape Town
www.formulasupercars.co.za

DRIVER DETAILS	: DATE
----------------	--------

1. FSC MEMBER NAME:	2. FSC MEMBER SURNAME:
3. CAR NUMBER AND CLASS:	4. MEMBERS SIGNATURE:

ENGINEERING WORKS DETAILS

5. COMPANY NAME:
6. PHYSICAL ADDRESS:

6A. TEL NO: ()	6B. EMAIL ADDRESS:
7A. ENGINEER NAME:	7B. ENGINEERS CONTACT NO:

CERTIFICATION OF OPEL 8V HEAD - MACHINED ACCORDING TO FORMULA SUPERCAR REGULATIONS**RULES TO COMPLY TO:****For control purposes, the following must be recorded:**

- a) Inlet manifolds as specified by the Supercar committee and matched 10mm deep on inlet manifold side and 25mm deep on head side.
- b) No machining is permitted in the combustion chambers other than the valve seats.
- c) Intake port diameter 36,5mm maximum.
- d) Valve Seats: New Valve Seats may be fitted to prolong the lifespan of the cylinder head.
- e) Valves: Valve manufacturer type is open, but the overall length and diameter of valve must conform to either of the below dimensions:

Standard Opel Valves

Part numbers:

Inlet GMT T29106 Exhaust TT291162

OR

Vera replacement valves

Part number:

Inlet 79259 Exhaust 79258

OR

Osvat valves

Part Number:

Inlet 1393 Exhaust 1396

SECTION D : CONFIRMATION

I, the Authorised Signatory of the above-mentioned Engineering Works hereby confirm that the cylinder head with the below J/C number stamped into the casing, has been machined according to the technical specifications of Formula Supercars as noted above.

JOB CARD NO:	
--------------	--

SIGNED: _____ **SIGNATORY NAME:** _____

DESIGNATION: _____ **DATE:** _____

--